

TUFFPOLY SKIRT SYSTEM


The range of ConvaTech polyurethane skirt systems ensures maximum retention of dust and product within the transfer chute reducing safety hazards and environmental impact around the conveyor.

This is achieved by ensuring that the structural steel of the transfer chute remains clear of the belt, reducing the possibility of belt damage through gouging, while the polyurethane skirt seals the transfer.

Balancing cost effectiveness with long life functionality makes this the ideal choice for your application.

Application

All conveyor loading areas.

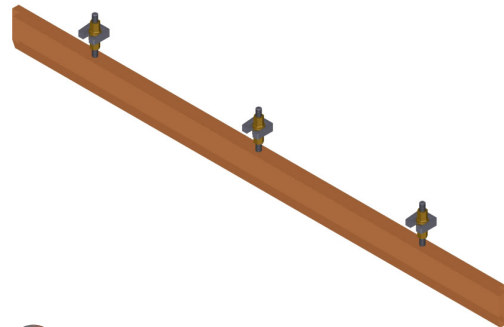

-  Proven Performance
-  Quality Product
-  Flexibility in Design
-  On-time Delivery
-  Australian Owned

FEATURES	BENEFITS
Manufactured from high grade polyurethane	= Increases longevity
Manufactured in 1340mm modules	= Allows easier access into tight fitting areas = Reduces manual handling hazards
Mounting bolts manufactured from 304 stainless steel and adjusting nuts manufactured from brass	= Eliminates binding = Easy to adjust and maintain
Manufactured from robust polyurethane	= Improves sealing effectiveness = Improves product retention

**Available in natural and FRAS polyurethane.*

ConvaTech®

Total Conveyor Maintenance

Item Code	Description	Unit	Overall Length (mm)	Weight (kg)
30-15-001	Skirting, Tuff polyurethane, Natural	Each	1340	6.45
30-15-002	Skirting, Tuff polyurethane, FRAS	Each	1340	6.45

New South Wales

ABN 19 002 924 307

PO Box 126, HRMC NSW 2310
3-7 Ironbark Close, Warabrook NSW 2304

P: 02 4935 0200

E: sales@convatech.com.au

Queensland

ABN 50 119 833 831

PO Box 8, Mackay QLD 4740
25-29 Interlink Court, Mackay QLD 4740

P: 07 4953 9100

E: salesqld@convatech.com.au

Western Australia

ABN 19 002 924 307

Unit 1/61 Mulgool Road
Malaga WA 6090

P: 08 9203 1111

E: sales@convatech.com.au

In partnership with

TSGlobal®

Leaders in Conveyor Products



www.convatech.com.au